FLEX SPEAKER

Scan to see
Flex Speaker in action

HIGH PERFORMANCE AUDIOLOGY SPEAKERS

No hassle speakers.

Flex Speaker is a passive, high-performance speaker that takes the guesswork out of speaker installation and configuration.



Corner profile



Front



Rear with mounting magnets

Mount it right the first time.

Built-in magnets hold each speaker on the booth wall before final securing, so left and right sit at the same height and spacing.

Measured and matched.

The included measuring tape sets both cones at an equal height from the floor. Pre-drilled holes allow corner or flat-wall mounting with no brackets.

Wired for your audiometer.

Speaker wire is included. GSI and EVO versions add an adapter cable from the audiometer's outputs to the speaker terminals.

Choose your audiometer connection

Each is a pair of speakers



FLEX-SPEAKER

No adapter. Speaker wire to terminal connection



FLEX-SPEAKER-GSI

GSI AudioStar Pro. 5-pin DIN to terminal




FLEX-SPEAKER-EVO

Interacoustics EVO. (2) mono 1/4 in to terminal

Corner or flat mount

Pre-drilled mounting holes, no brackets needed

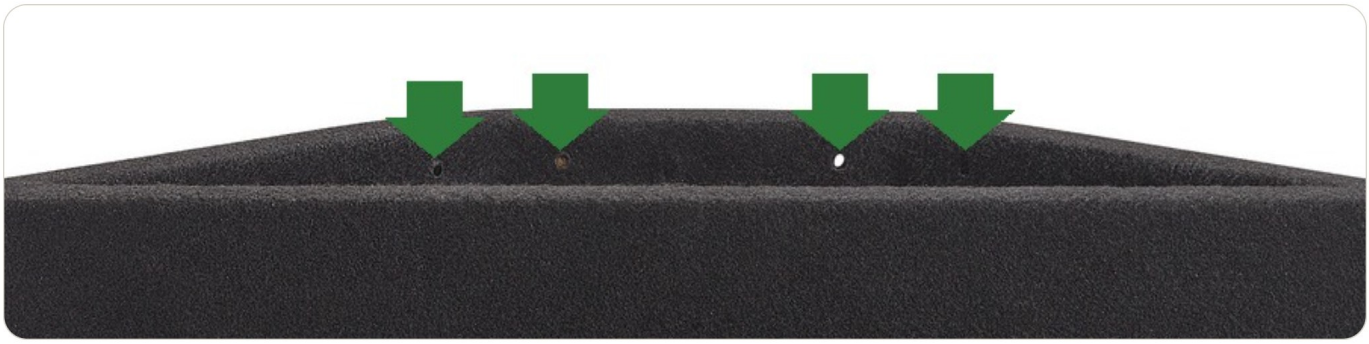


In the box

- ✓ Pair of Flex Speakers
- ✓ Measuring tape for cone height
- ✓ Adapter cable (GSI and EVO versions)
- ✓ 10 m of speaker wire
- ✓ Built-in magnet mount assistance

Frequency response

Output level, dB SPL

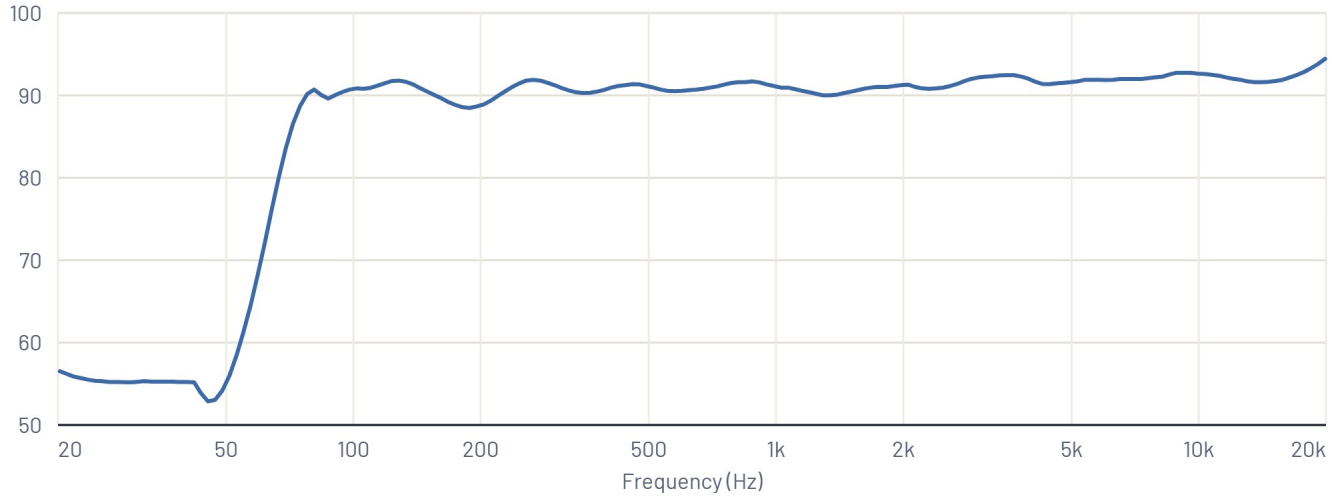

Specifications

Speaker type	Passive	Speaker input	Terminal connection
Impedance	8 Ω	Dimensions	12 in × 7 in × 14 in
Weight	5 lb	Magnet pull, vertical	35 lb
Magnet pull, horizontal	25 lb	Speakers per set	2
Speaker cord length	10 m (×2)	GSI connection	5-pin DIN to terminal
EVO connection	(2) mono 1/4 in to terminal	Warranty	1 year

Flex VRA® is a registered trademark.