




Screen Mirror

Turn your VRA into an External Monitor


Note: Screen Mirror is only mirroring the video source to the VRA monitor. It does not allow for touch inputs on the VRA monitor to be passed back to the video source (GSI Audiostar or PC). If remote control of the video source is desired, it's advised to utilize a wireless mouse and keyboard plugged into the video source.

Installation


1. Determine which Flex VRA monitor will be used for screen mirror (the Left, the Right, or the Center). Plug in the video capture card connected to the USB cable into an open port on the monitor.
2. Connect one end of the 15 ft. HDMI cable into the USB Capture Card.
3. Run the other end of the HDMI cable through the pass-through hole of the jack panel to the operator side of the booth.
4. Plug the other end of the HDMI Cable into the video source (GSI Audiostar Pro or PC Computer).

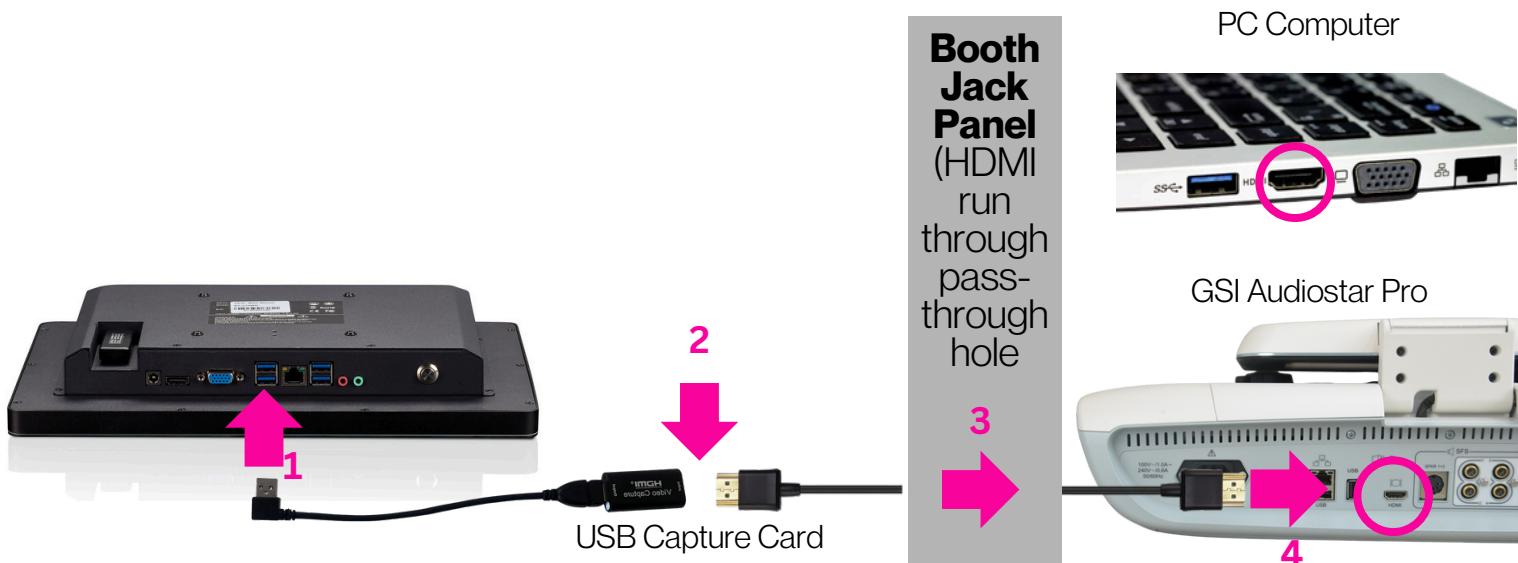

How To Use

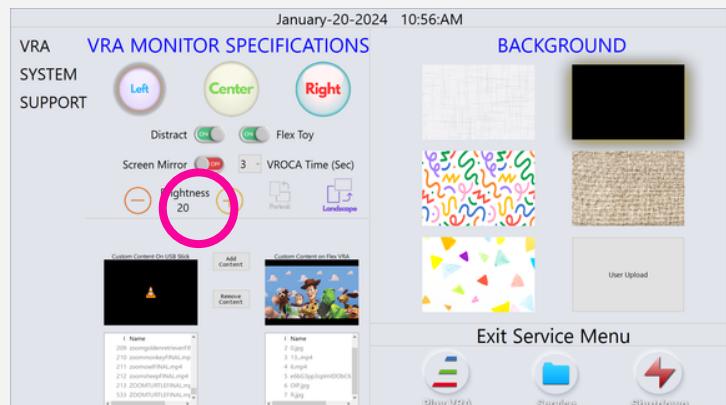

If you ordered Flex VRA with Screen Mirror, it has already been enabled and ready to use. If you are adding it after the fact, enter "Setup" from the touch menu and turn Screen Mirror "ON", then press "Play VRA" to exit.

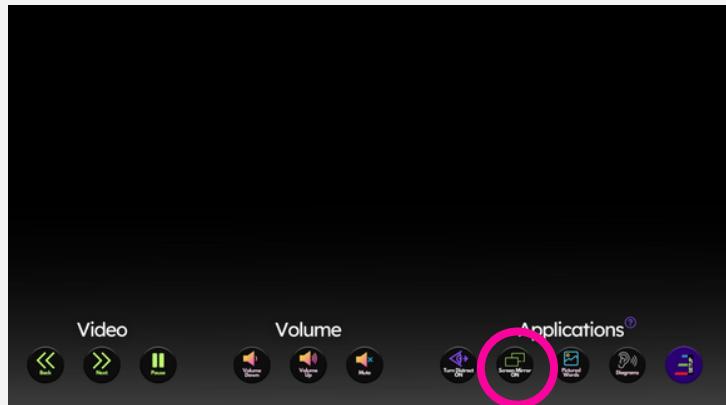

You're now ready to use Flex Screen Mirror! Tap on the monitor once and select screen mirror from the on-screen menu to view your source. To exit screen mirror, press the blue "Screen Mirror Off" button on the top left corner of the Screen Mirror Screen.